



# ELYPSO



## THE VERSATILE FRONT-DESK CARD SYSTEM

The Elypso printer was designed for all your individual plastic card printing and personalization needs: monochrome or color, with multiple encoding options.

Specially developed for use at customer-facing counters, Elypso fits seamlessly with your existing systems and is your best choice for instant card personalization.

### CONFIGURATION ON DEMAND


- According to your needs, Elypso can print either single or dual sided cards.
- The printer can also be equipped with encoders for magnetic stripe and contact and contactless smart cards.

### PERFECT INTEGRATION

- The software architecture of Evolis Premium SDK was designed to make Elypso fit seamlessly with your existing computer systems.
- Very compact (barely bigger than a standard letter size sheet of paper) and quiet, Elypso is discreet and has a small footprint.

### EASE OF USE

- Thanks to Elypso's unique front-loading design, insertion and retrieval of cards make it easy to access even in tight spaces.
- With the Evolis Premium Suite® software you can receive notifications and easily control the printer from your computer.

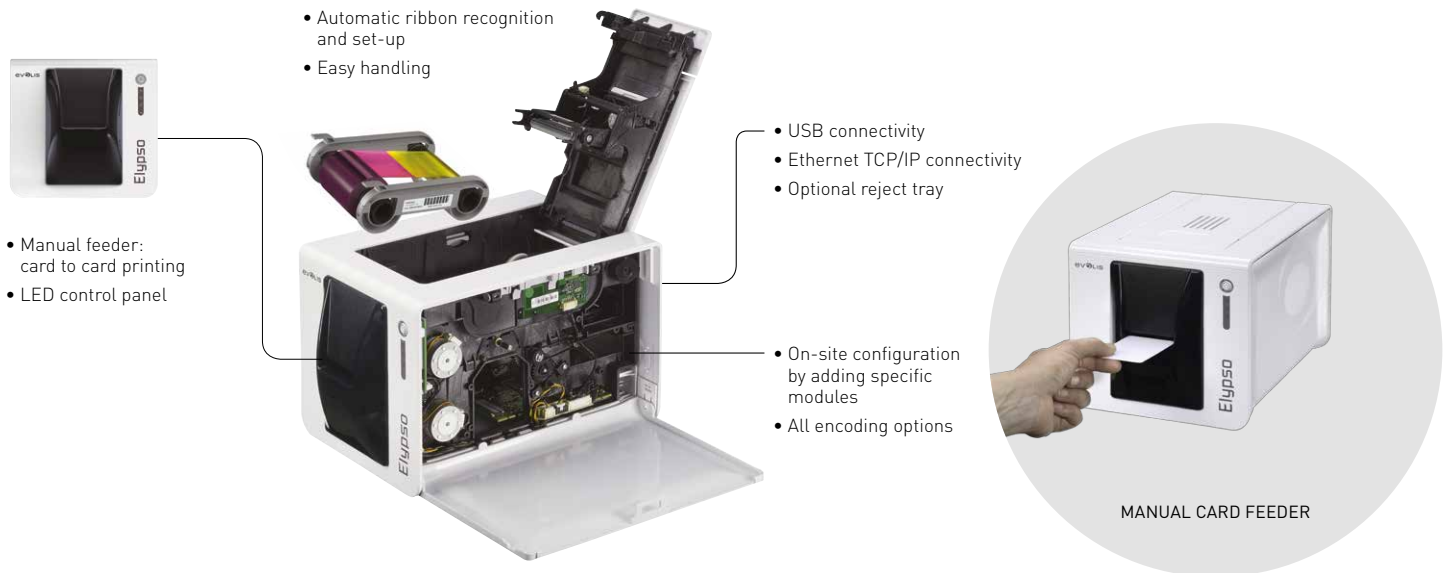

- Automatic ribbon recognition and set-up
- Easy handling
- USB connectivity
- Ethernet TCP/IP connectivity
- Optional reject tray
- On-site configuration by adding specific modules
- All encoding options
- Manual feeder: card to card printing
- LED control panel

MANUAL CARD FEEDER

## MAIN FEATURES / Full technical specifications on [www.evolis.com](http://www.evolis.com)

### GENERAL FEATURES

- Direct-to-card dye-sublimation/Resin thermal transfer
- Single-sided printing, edge-to-edge
- Standard 300 x 300 dpi resolution
- Customizable 300 x 600 dpi resolution (color and monochrome printing) or 300 x 1200 dpi resolution (monochrome printing only)
- 32 MB memory (RAM) standard - optional 64 MB<sup>1</sup>

### PRINTING PERFORMANCES

- Single side :
  - Color (YMCKO): 20.2 s per card
  - Monochrome: 6.5 s per card
- Dual side (YMCKO-K): 27.3 s per card

### INTERFACES

- USB (1.0, 1.1, 2.0, 3.0), cable supplied
- Ethernet TCP-IP 10BaseT, 100BaseT (Traffic Led)
- 802.11b/g wireless connection as an option

### CARD MANAGEMENT AND SPECIFICATIONS

- Manual feeder: card to card printing
- Card thickness: 0.50 to 1.25 mm (20 to 50 mil), no gauge adjustment, case by case for the 0.25 mm/10 mil plastic cards
- Card types: PVC cards, composite PVC cards, PET cards, ABS cards<sup>1</sup>, special varnished cards<sup>1</sup>
- Card format: ISO CR80 - ISO 7810 (53.98 mm x 85.60 mm)

### OPTIONAL FEATURES

- Upgrade kit for dual-sided printing
- Reject tray: 30 cards (0.76 mm - 30 mil)
- Wireless connection 802.11b/g

### ADDITIONAL ENCODING MODULES

- Available modules:
  - Magnetic stripe encoder ISO 7811 HiCo/LoCo, JIS2
  - Smart contact station ISO 7816-2
  - Contact smart card encoder - PC/SC, EMV 2000-1
  - Contactless smart card encoder - ISO 14443A, B, ISO15693, MIFARE, DESFire, HID iCLASS, UHF [standard compliance: EPC C1 Gen2 / ISO18000-6C ETSI EN 302 208 or FCC part 15.247]
  - Other specific encoders upon request
- Internal USB or IP ports
- Options can be combined
- Factory-installed or installed on site

### SAFETY

- Support for Kensington<sup>®</sup> security lock
- Data encryption for magnetic encoding

### DISPLAY

- Printer LEDs
- Graphical notifications from the printer<sup>2</sup>: cleaning alerts, empty/low level ribbon alert, etc.

### EVOLIS HIGH TRUST<sup>®</sup> RIBBONS

To maximise the quality and durability of printed cards, the lifespan of the print head and the overall printer reliability, use Evolis High Trust<sup>®</sup> ribbons.

- Automatic identification and setting
- Delivered in a drop-in cassette for easy handling
- Ribbon saver for monochrome printing

List of ribbons available on [www.evolis.com](http://www.evolis.com)

### SOFTWARE

- Delivered with Evolis Premium Suite<sup>®</sup> for Windows<sup>®</sup>:
  - Printer driver
  - Evolis Print Center for printer administration and settings
  - Evolis Printer Manager for graphical notification<sup>3</sup>
  - 24/7 online support
  - Compatible with Windows<sup>®</sup> (32/64 bits): XP SP3, Vista, W7, W8, W10
- Delivered with a driver for Mac OS X (from 10.5 onwards)
- Linux upon request
- Evolis Premium SDK for remote supervision of the printer, while facilitating and speeding up integration into IT systems

### ECO-FRIENDLY DESIGN, CERTIFICATIONS AND STATEMENT OF COMPLIANCE

- Standby, sleep modes & reduced energy consumption
- CE, FCC, IEC, VCCI, CCC, KC, EAC, BIS
- RoHS

### SIZE AND WEIGHT

- Size (H x W x D): 195 x 205 x 314 mm (7.68" x 8.07" x 12.36")
- Weight: 2.95 kg (6.5 lbs)

### WARRANTY

- 1-year warranty (printer and print head)<sup>4</sup>
- Warranty extension available as an option

<sup>1</sup> Under specific conditions / <sup>2</sup> Depends on the Windows<sup>®</sup> version / <sup>3</sup> Requires the .net 4.0 client profile version / <sup>4</sup> Warranty subject to observance of specific conditions and use of Evolis High Trust<sup>®</sup> ribbons

### EUROPE - MIDDLE-EAST - AFRICA

Evolis - 14 avenue de la Fontaine - ZI Angers-Beaucouzé  
49070 Beaucouzé - France  
T +33 (0) 241 367 606 - F +33 (0) 241 367 612 - [info@evolis.com](mailto:info@evolis.com)

**AMERICAS** - Evolis Inc. - Fort Lauderdale - [evolisinc@evolis.com](mailto:evolisinc@evolis.com)

**ASIA-PACIFIC** - Evolis Asia Pte Ltd - Singapore - [evolisasia@evolis.com](mailto:evolisasia@evolis.com)

**CHINA** - Evolis China - Shanghai - [evolischina@evolis.com](mailto:evolischina@evolis.com)

**INDIA** - Evolis India - Mumbai - [evolisindia@evolis.com](mailto:evolisindia@evolis.com)